

30V_{DS}/±20V_{GS} N-Channel Enhancement Mode MOSFET


Features

- V_{DS}=30V, I_D=55A
- R_{DS(ON)}=5.5mΩ (TYP.) V_{GS}=10V, I_D=1A
- R_{DS(ON)}=6.5mΩ (TYP.) V_{GS}=4.5V, I_D=2A
- R_{DS(ON)}=15mΩ (TYP.) V_{GS}=2.5V, I_D=5A
- Reliable and Rugged
- Avalanche Rated
- Low On-Resistance

Applications

- Load Switch
- Power management in portable/desktop PCs
- DC/DC conversion

PDFN5060

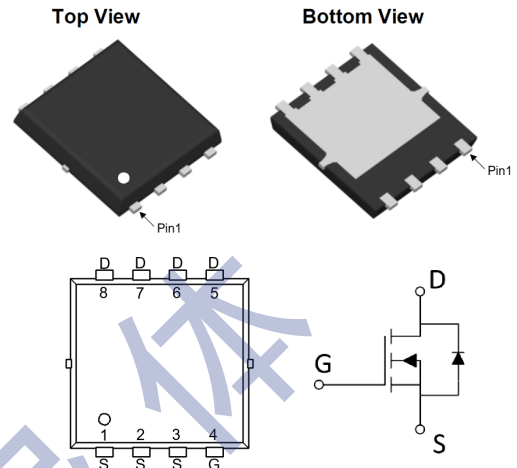

Ordering Information

| Temperature Range | package | Orderable Device | Package Qty. |
|-------------------|------------------|------------------|--------------|
| -55℃~+125℃ | PDFN5060 Pb-Free | CWT361AE | 5000pcs/Reel |

Absolute Maximum Ratings (T_C=25℃, unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|---------|------|
| Drain-Source Voltage (V _{GS} =0V) | V _{DS} | 30 | V |
| Gate-Source Voltage (V _{GS} =0V, static) | V _{GS} | ±20 | V |
| Continuous Drain Current (T _C =25℃) | I _D | 55 | A |
| Continuous Drain Current (T _C =100℃) | | 38 | A |
| Pulsed Drain Current | I _{DM} | 98 | A |
| Single Pulsed Avalanche Energy | E _{AS} | 65 | mJ |
| Maximum Power Dissipation (T _C =25℃) | P _D | 25 | W |
| Maximum Power Dissipation (T _C =100℃) | | 12 | W |
| Operating, Storage Temperature Range | T _J , T _{STG} | -55~150 | ℃ |

Thermal Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---|------------------|------|------|------|------|
| Thermal Resistance, Junction-to-Case | R _{θJC} | - | 4.2 | - | ℃/W |
| Thermal Resistance, Junction-to-Ambient | R _{θJA} | - | 50 | - | ℃/W |

Electrical Characteristics

| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|--------------|-------------------------------|------|------|-----------|------------|
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V, I_D=250\mu A$ | 30 | - | - | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=30V, V_{GS}=0V$ | - | - | 1 | μA |
| Gate -Source Leakage Current | I_{GSS} | $V_{GS}=\pm 20V, V_{DS}=0V$ | - | - | ± 100 | nA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$ | 0.8 | 1.1 | 1.4 | V |
| Drain-Source On-stage Resistance | $R_{DS(on)}$ | $V_{GS}=10V, I_D=1A$ | - | 5.5 | 6.6 | m Ω |
| | | $V_{GS}=4.5V, I_D=2A$ | - | 6.5 | 8 | |
| | | $V_{GS}=2.5V, I_D=5A$ | - | 15 | 19 | |


Dynamic Characteristics






| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|--------------|-----------------|------|------|------|----------|
| Input capacitance | C_{iss} | $V_{DS}=15V$ | - | 1710 | - | pF |
| Output capacitance | C_{oss} | $V_{GS}=0V$ | - | 225 | - | |
| Reverse transfer capacitance | C_{riss} | $f=1MHz$ | - | 205 | - | |
| Gate Resistance | R_g | $f=1MHz$ | - | 1.6 | - | Ω |
| Total Gate Charge | Q_g | $V_{DS}=15V$ | - | 39 | - | nC |
| Gate Source Charge | Q_{gs} | $V_{GS}=10V$ | - | 2.7 | - | |
| Gate Drain Charge | Q_{gd} | $I_D=20A$ | - | 11 | - | |
| Turn-on delay Time | $t_{d(on)}$ | $V_{GS}=10V$ | - | 14 | - | ns |
| Rise time | t_r | $V_{DS}=15V$ | - | 27 | - | |
| Turn-off delay Time | $t_{d(off)}$ | $R_L=3.5\Omega$ | - | 65 | - | |
| Fall time | t_f | $R_G=6.8\Omega$ | - | 19 | - | |

Reverse Diode Characteristics

| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|----------------------------|----------|-------------------------|------|------|------|------|
| Body Diode Forward Voltage | V_{SD} | $V_{GS}=0V, I_{SD}=1A$ | - | 0.8 | 1 | V |
| Reverse Recovery Time | t_{rr} | $V_{GS}=0V, I_{SD}=20A$ | - | 16 | - | ns |
| Reverse Recovery Charge | Q_{rr} | $d_i/d_t=100A/\mu s$ | - | 21 | - | nC |

Electrical Characteristics Diagrames

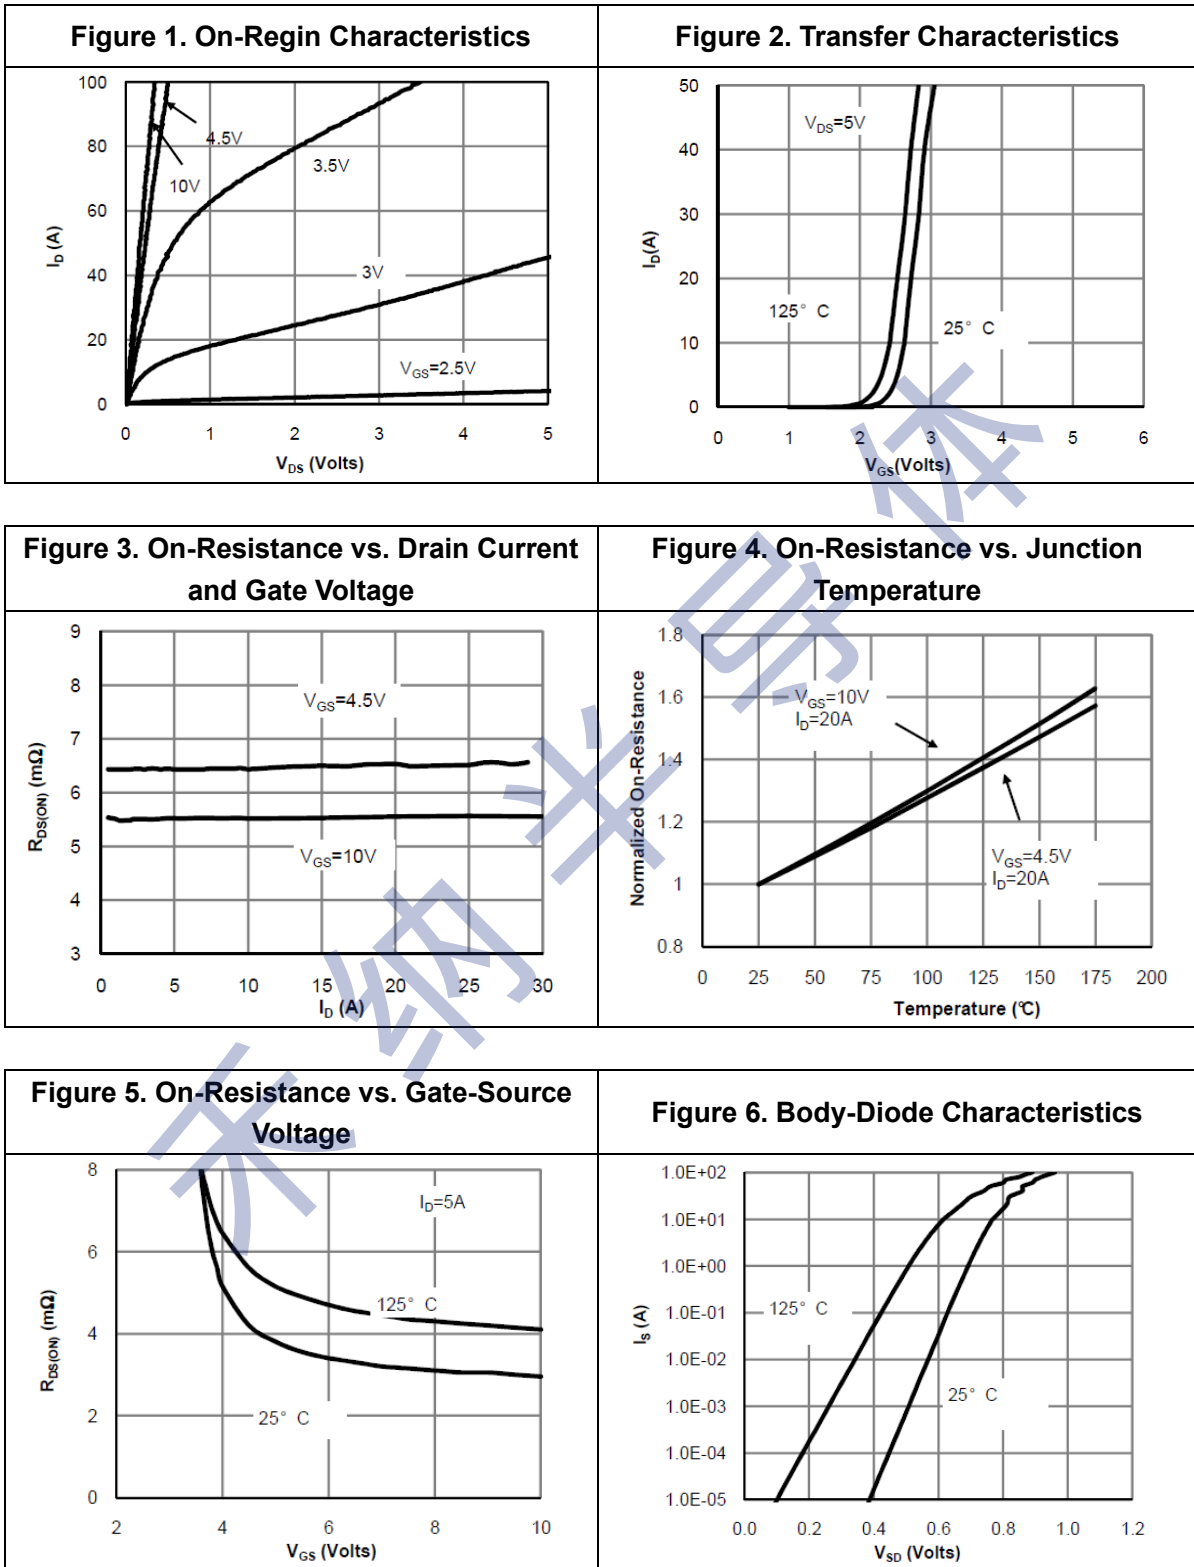


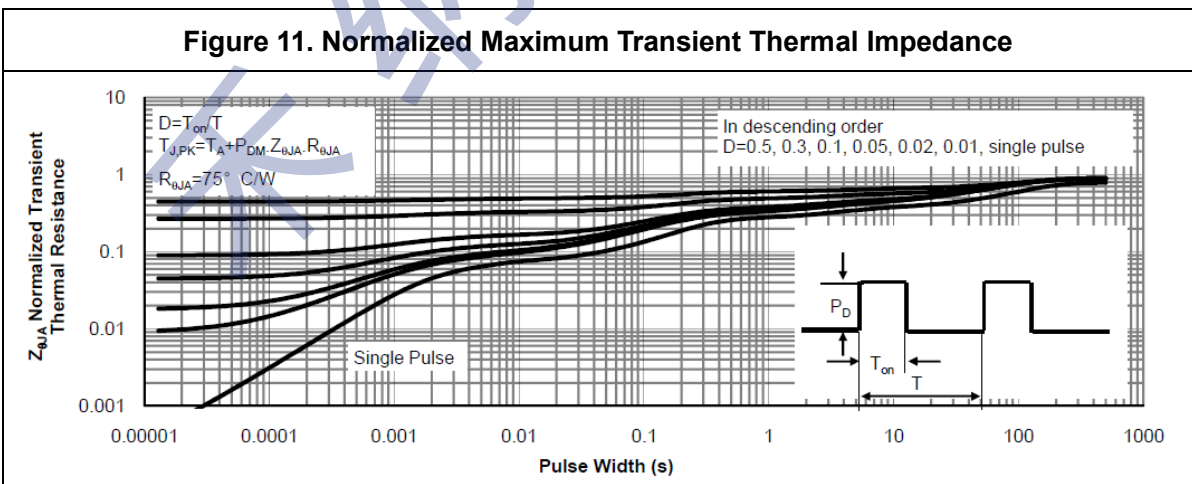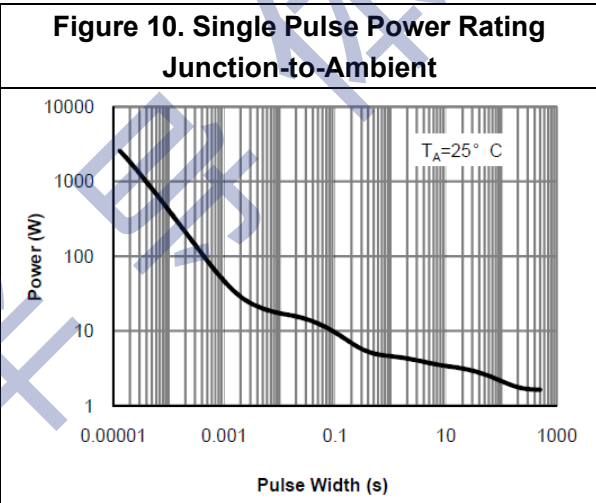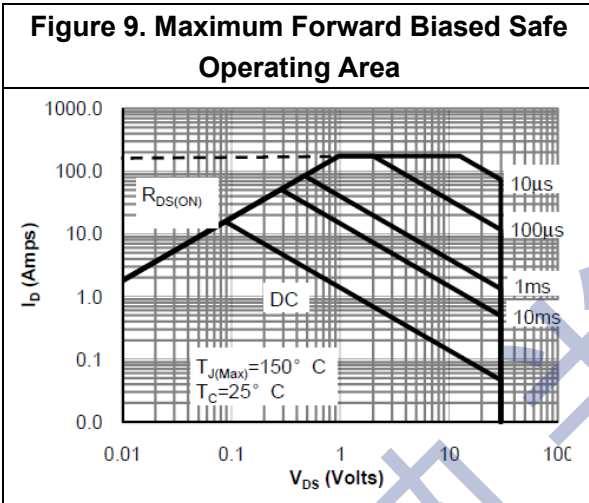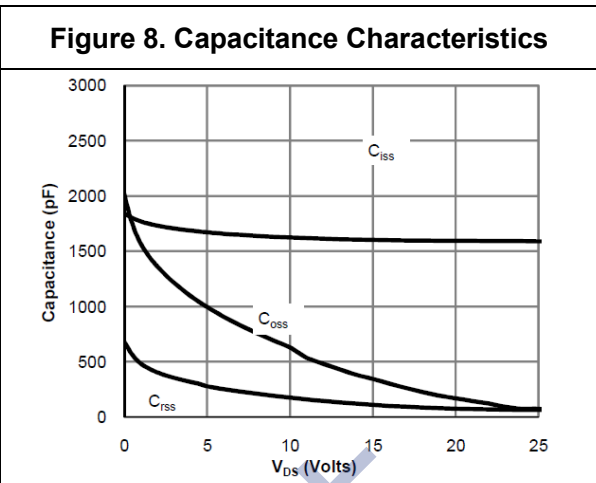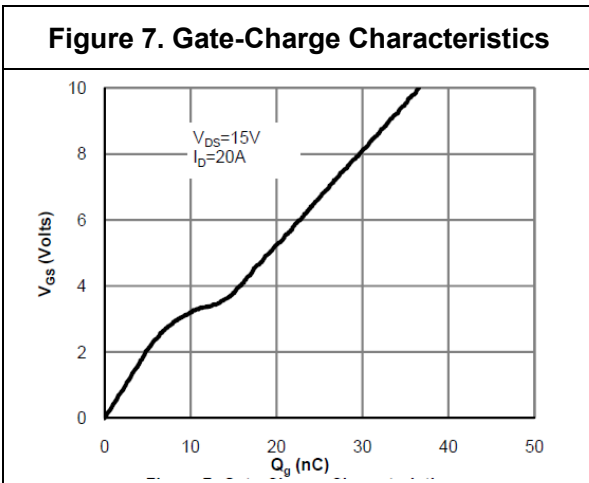



Physical Dimensions

PDFN5060

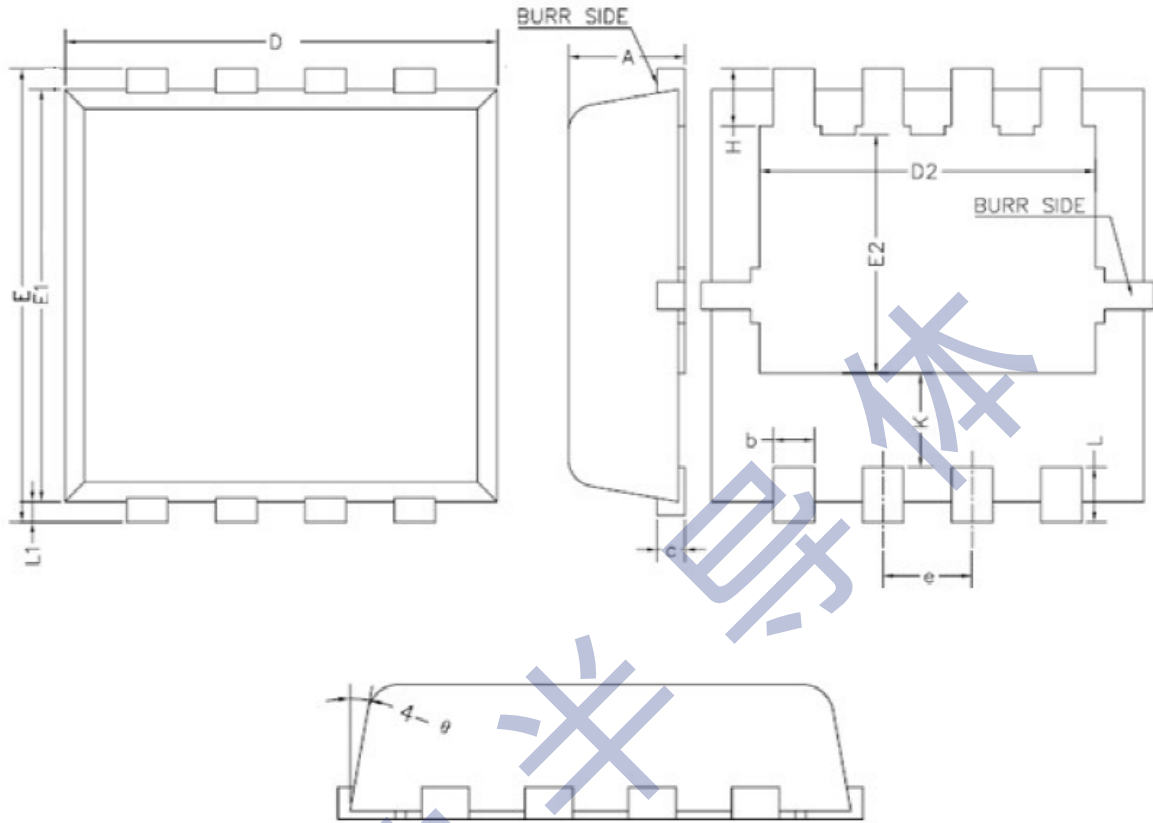

| 符号 | 尺寸 (mm) | | | 符号 | 尺寸 (mm) | | |
|----|---------|------|------|----------|---------|------|------|
| | 最小值 | 典型值 | 最大值 | | 最小值 | 典型值 | 最大值 |
| A | 0.90 | 1.00 | 1.10 | E1 | 5.70 | 5.75 | 5.80 |
| b | 0.33 | 0.41 | 0.51 | E2 | 3.38 | 3.58 | 3.78 |
| c | 0.20 | 0.25 | 0.30 | H | 0.41 | 0.51 | 0.61 |
| D | 4.80 | 4.90 | 5.00 | K | 1.10 | - | - |
| D1 | 3.61 | 3.81 | 3.96 | L | 0.51 | 0.61 | 0.71 |
| e | 1.27BSC | | | L1 | 0.06 | 0.13 | 0.20 |
| E | 5.90 | 6.00 | 6.10 | θ | 0° | - | 12° |

< Copyright >

All the Patent, Copyright and IP contained in this document belong to ALE, shall not be reproduced, copied, or used in other ways without permission.